


### CLOSED POTABLE WATER RETAINING STRUCTURE – NEW CONSTRUCTION

**Scope:**  
Waterproofing of potable water reservoirs, above or below ground.

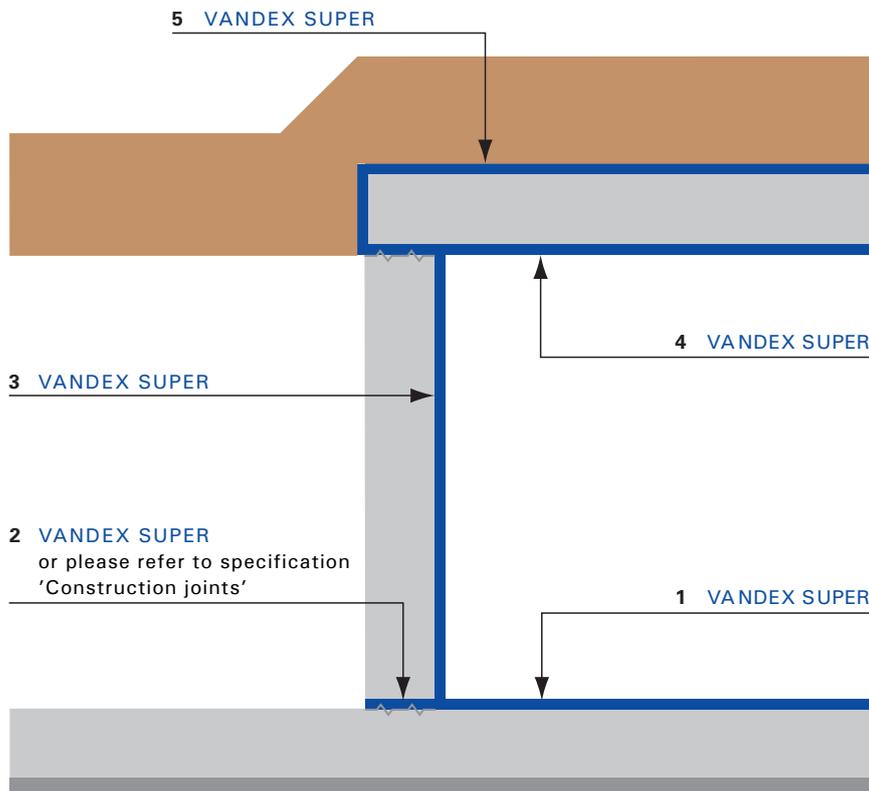

#### Application Instructions

- 1 Apply one coat of VANDEX SUPER to floor.
- 2 **Optional:** Apply VANDEX SUPER to all construction joints in accordance with the specification 'Construction Joints'.
- 3 Apply two coats of VANDEX SUPER to the walls. Apply the second coat whilst the first is still green.
- 4 Apply one coat of VANDEX SUPER to the soffit.
- 5 If the structure is earth covered, apply VANDEX SUPER to the deck slab.

#### Alternatives:

- Where a very smooth surface is specified, replace VANDEX SUPER by VANDEX BB 75.
- Where better aesthetics is required, replace VANDEX SUPER by VANDEX SUPER WHITE or VANDEX CONCRETE GREY.

#### Remark:

- Substrate adhesion strength > 1.5 N/mm<sup>2</sup>

For further technical details and consumptions refer to technical data sheet or consult a technical Vandex representative.

The information contained herein is based on our long-term experience and the best of our knowledge. We can, however, make no guarantee since for a successful outcome, all circumstances in an individual case must be taken into consideration. Indications of quantities required are only averages which in certain cases might be greater.