


BELOW GROUND CONCRETE WALL AND SLAB – EXTERNAL WATERPROOFING

Scope:

External waterproofing of below ground wall and slab structures subject to ground moisture or hydrostatic pressure.

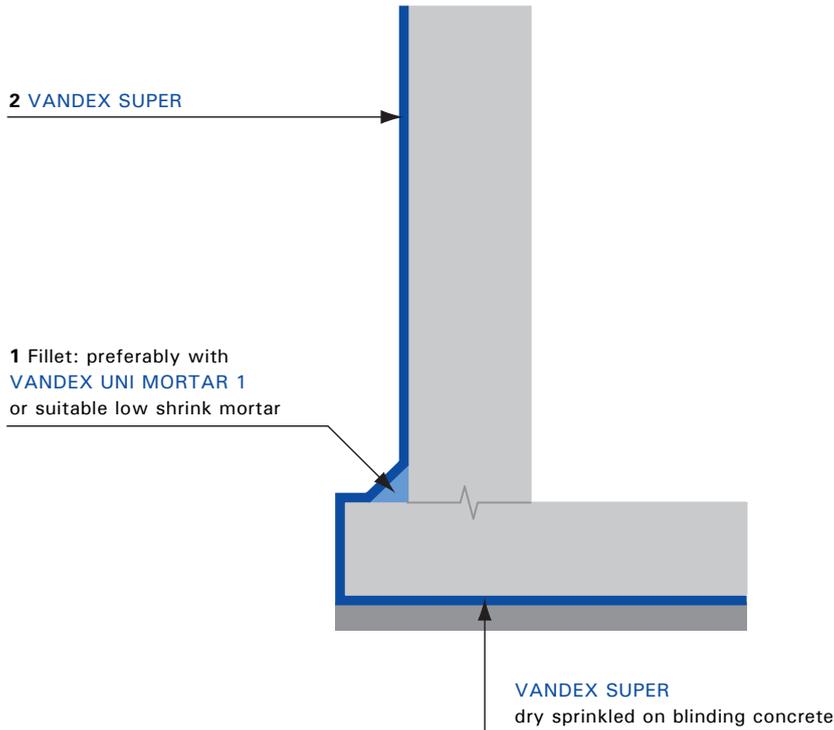

Application Instructions

- 1 Apply an angle fillet with suitable mortar, preferably with VANDEX UNI MORTAR 1, at wall / floor junction.
- 2 Apply two coats of VANDEX SUPER to the vertical surfaces and over the fillet.

Remark:

- Substrate adhesion strength > 1.5 N/mm²

For further technical details and consumptions refer to technical data sheet or consult a technical Vandex representative.

The information contained herein is based on our long-term experience and the best of our knowledge. We can, however, make no guarantee since for a successful outcome, all circumstances in an individual case must be taken into consideration. Indications of quantities required are only averages which in certain cases might be greater.