


BELOW GROUND CONCRETE WALL AND SLAB – INTERNAL WATERPROOFING

Scope:

Internal waterproofing of new or existing below ground wall and slab structures subject to ground moisture or hydrostatic pressure.

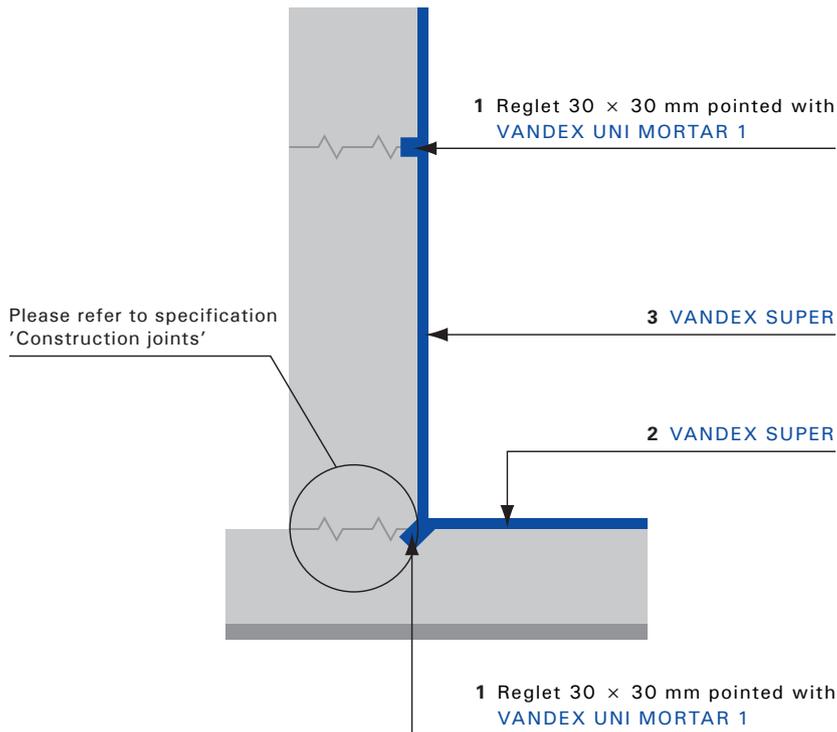

Application Instructions

1 Optional: Chisel out a reglet (approx. 30 × 30 mm) along the construction joints. Fill the cleaned reglet with VANDEX UNI MORTAR 1, such that it finishes flush with the internal surface.

2 Apply one coat of VANDEX SUPER to slab surface.

3 Apply two coats of VANDEX SUPER to the interior wall surface.

Remark:

- Substrate adhesion strength > 1.5 N/mm²

For further technical details and consumptions refer to technical data sheet or consult a technical Vandex representative.

The information contained herein is based on our long-term experience and the best of our knowledge. We can, however, make no guarantee since for a successful outcome, all circumstances in an individual case must be taken into consideration. Indications of quantities required are only averages which in certain cases might be greater.