


## BELOW GROUND CONCRETE BLOCK WALL AND SLAB – EXTERNAL WATERPROOFING

### Scope:

External waterproofing of concrete block wall/brick wall and slab structures not subject to hydrostatic pressure.

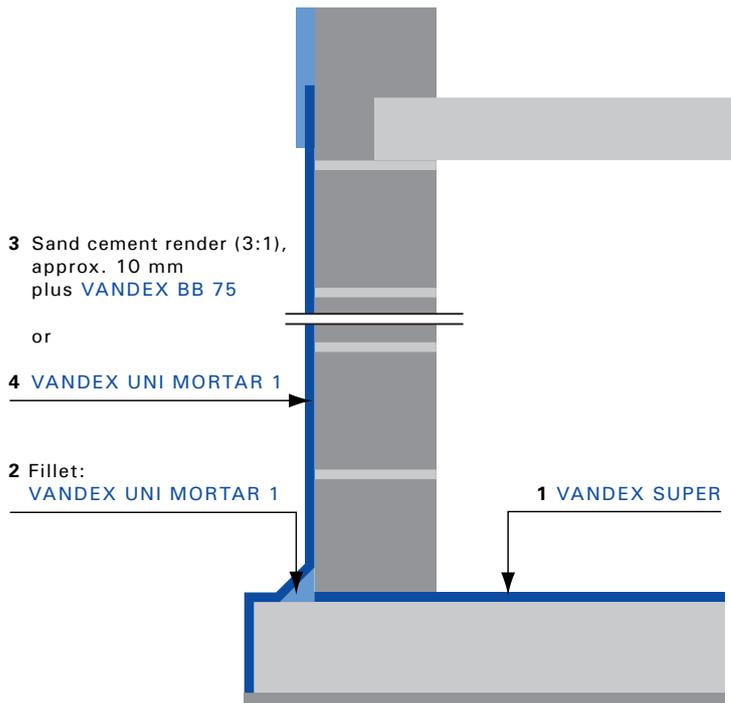

3 Sand cement render (3:1),  
approx. 10 mm  
plus VANDEX BB 75

or

4 VANDEX UNI MORTAR 1

2 Fillet:  
VANDEX UNI MORTAR 1

1 VANDEX SUPER

### Application Instructions

1 Apply one coat of VANDEX SUPER to the slab surface.

2 Apply an angle fillet with suitable mortar, preferably with VANDEX UNI MORTAR 1 at slab / wall junction.

3 Apply a sand-cement render (3:1) to a thickness of approx. 10 mm to the vertical surface. On top of the roughened surface apply one coat of VANDEX BB 75.

or

4 Apply a single layer VANDEX UNI MORTAR 1, if substrate is rough.

### Remark:

- Substrate adhesion strength > 1.5 N/mm<sup>2</sup>

For further technical details and consumptions refer to technical data sheet or consult a technical Vandex representative.

The information contained herein is based on our long-term experience and the best of our knowledge. We can, however, make no guarantee since for a successful outcome, all circumstances in an individual case must be taken into consideration. Indications of quantities required are only averages which in certain cases might be greater.