


## BELOW GROUND CONCRETE BLOCK WALL AND SLAB – INTERNAL WATERPROOFING

### Scope:

Internal waterproofing of new or existing concrete block wall/brick wall and slab structures not subject to hydrostatic pressure.

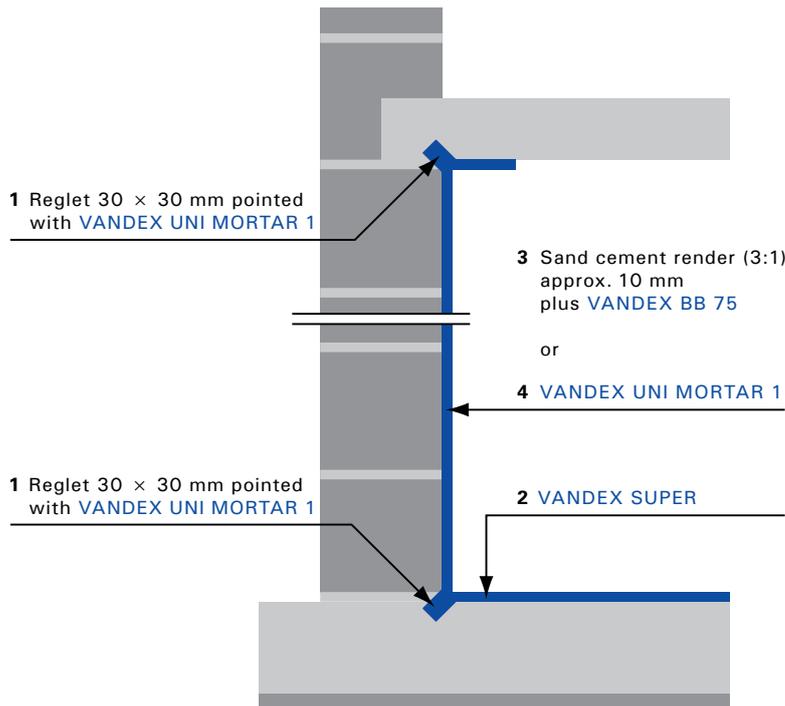

### Application Instructions

- 1 **Optional:** Apply a coved fillet with a suitable mortar, preferably with VANDEX UNI MORTAR 1 at the wall / floor junction.
  - 2 Apply one coat of VANDEX SUPER to the slab surface and footing.
  - 3 Apply a sand cement render (3:1) to a thickness of approx. 10 mm to the vertical surface. On top of the roughened surface apply one coat of VANDEX BB 75.
- or
- 4 Apply a single layer VANDEX UNI MORTAR 1, if substrate is rough.

### Remark:

- Substrate adhesion strength > 1.5 N/mm<sup>2</sup>

For further technical details and consumptions refer to technical data sheet or consult a technical Vandex representative.

The information contained herein is based on our long-term experience and the best of our knowledge. We can, however, make no guarantee since for a successful outcome, all circumstances in an individual case must be taken into consideration. Indications of quantities required are only averages which in certain cases might be greater.