


TUNNEL – REFURBISHMENT

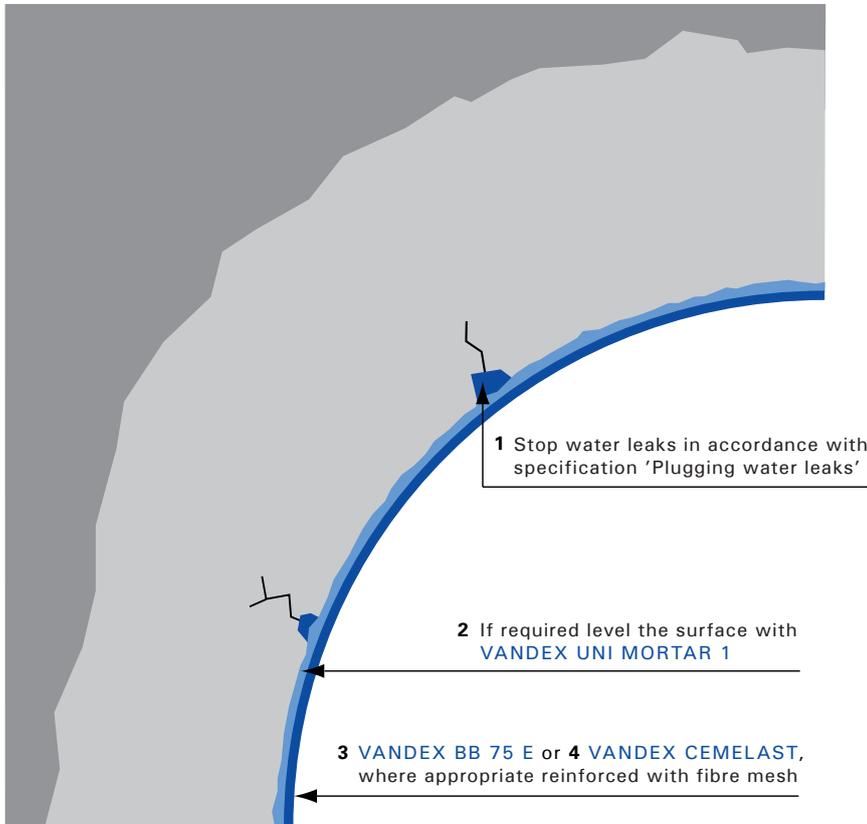

Application Instructions

- 1 Stop water leaks in accordance with the specification 'Plugging water leaks'.
- 2 Apply VANDEX UNI MORTAR 1, as a levelling and waterproofing repair lining.
- 3 Apply VANDEX BB 75 E, where appropriate reinforced with a fibre mesh, as a crack bridging surface waterproofer.

or

- 4 Apply VANDEX CEMELAST, where appropriate reinforced with a fibre mesh, for concrete protection (carbonation and chloride barrier).

Remark:

- Substrate adhesion strength > 1.5 N/mm²

For further technical details and consumptions refer to technical data sheet or consult a technical Vandex representative.

The information contained herein is based on our long-term experience and the best of our knowledge. We can, however, make no guarantee since for a successful outcome, all circumstances in an individual case must be taken into consideration. Indications of quantities required are only averages which in certain cases might be greater.