


SWIMMING POOL – REFURBISHMENT

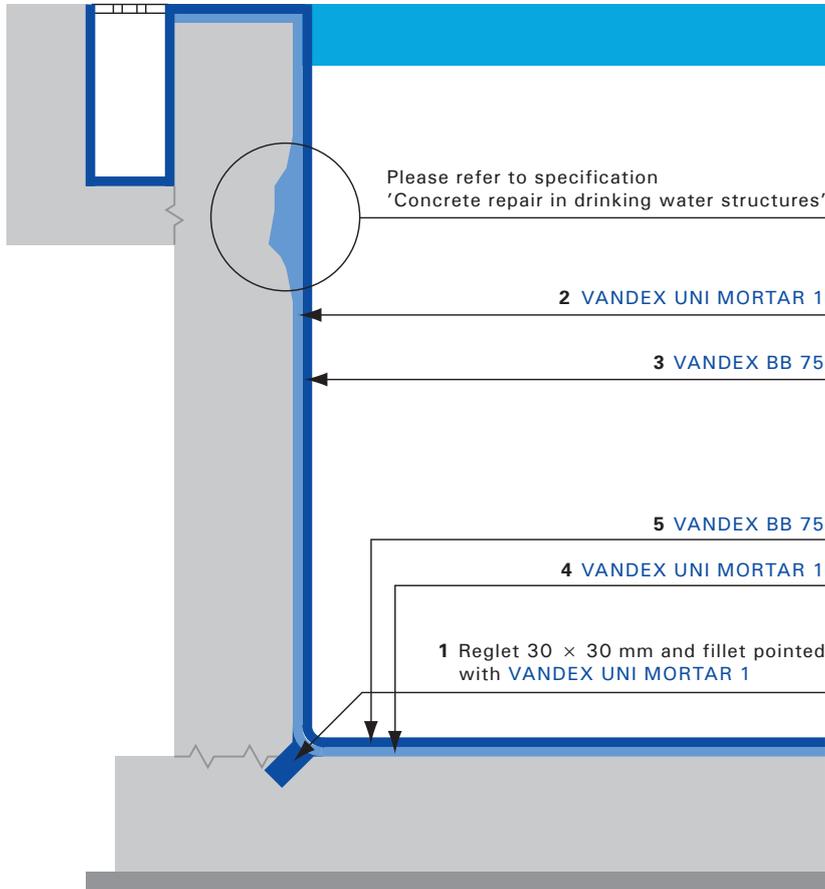

Application Instructions

- 1 Optional:** Chisel out a reglet (approx. 30 × 30 mm) along the construction joints. Point the cleaned reglet and form a covered fillet with a suitable mortar, preferably with VANDEX UNI MORTAR 1 at the slab and wall junction.
- 2** Apply one layer of VANDEX UNI MORTAR 1 to the vertical surfaces as surface leveller, also to increase concrete cover to the reinforcement.
- 3** Apply two coats of VANDEX BB 75 as final lining.
- 4** Apply one layer of VANDEX UNI MORTAR 1 to the slab as surface leveller, also to increase concrete cover to the reinforcement.
- 5** Apply two coats of VANDEX BB 75 as final lining.

Remark:

- Substrate adhesion strength > 1.5 N/mm²

For further technical details and consumptions refer to technical data sheet or consult a technical Vandex representative.

The information contained herein is based on our long-term experience and the best of our knowledge. We can, however, make no guarantee since for a successful outcome, all circumstances in an individual case must be taken into consideration. Indications of quantities required are only averages which in certain cases might be greater.