


SWIMMING POOL – NEW CONSTRUCTION WITH TILES

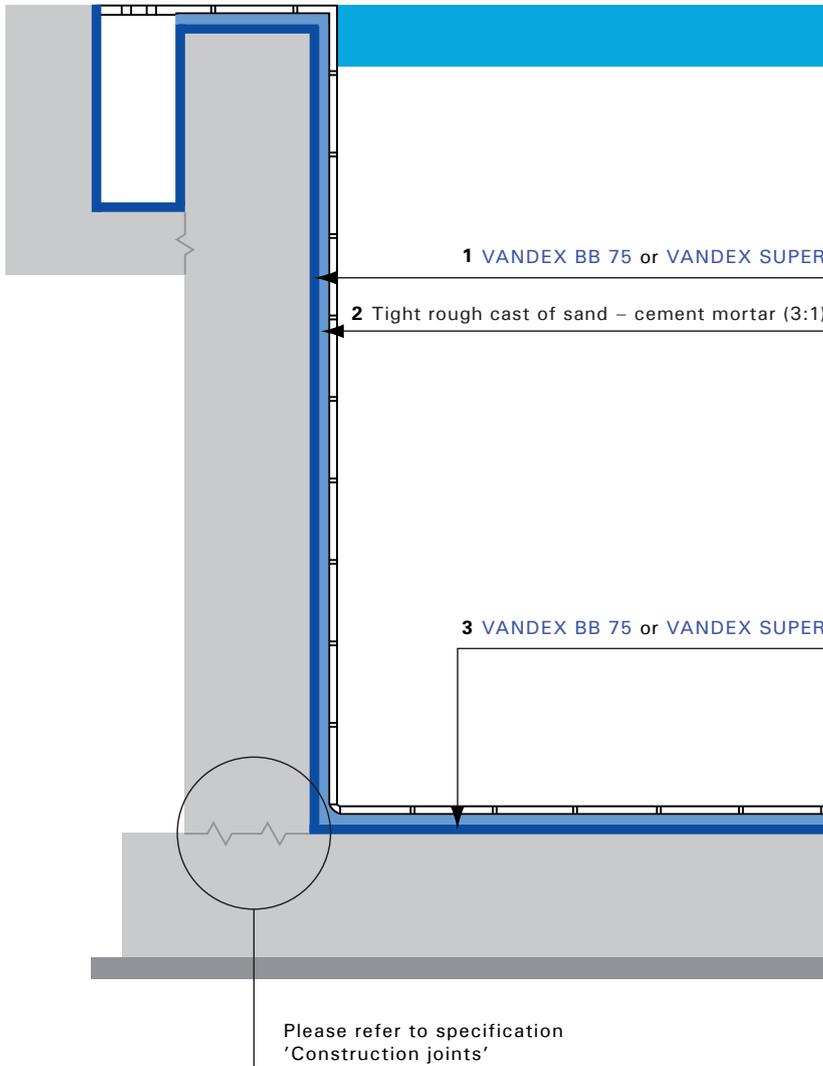

Application Instructions

- 1 Apply two coats of VANDEX BB 75 or alternatively two coats of VANDEX SUPER to the vertical surfaces.
- 2 Onto the vertical surface apply a tight rough cast of sand and cement mortar (3:1) covering approx. 50 % of surface, applied 'green on green' to the Vandex lining.
- 3 Apply two coats of VANDEX BB 75 or one coat of VANDEX SUPER to horizontal surfaces.

Remark:

- Substrate adhesion strength > 1.5 N/mm²

For further technical details and consumptions refer to technical data sheet or consult a technical Vandex representative.

The information contained herein is based on our long-term experience and the best of our knowledge. We can, however, make no guarantee since for a successful outcome, all circumstances in an individual case must be taken into consideration. Indications of quantities required are only averages which in certain cases might be greater.